


Slotted flat countersunk head screws

Tornillos con cabeza avellanada ranurada

开槽沉头螺钉

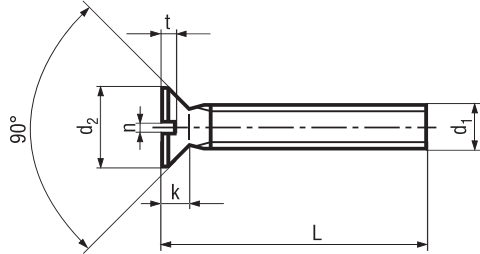

d ₁	M3	M4	M5	M6	M8	M10
d ₂	5,6	7,5	9,2	11	14,5	18
k	1,65	2,2	2,5	3	4	5
n	0,8	1	1,2	1,6	2	2,5
t	0,6	0,8	1	1,2	1,6	2



For thread lengths: see page 13.004
Longitud de rosca: véase 13.004

BN 1066				■							
d ₁	L	☒ / ☒	☒	d ₁	L	☒ / ☒	☒	d ₁	L	☒ / ☒	☒
M3	6	●	100	M4	30	●	100	M6	35	●	100
	8	●	100		M5	35	●		100	40	●
	10	●	100	8		●	100		50	●	100
	12	●	100	10		●	100		60	●	100
	16	●	100	12	●	100	M8	16	●	100	
	20	●	100	16	●	100		20	●	100	
	25	●	100	20	●	100		25	●	100	
30	●	100	25	●	100	30		●	100		
M4	6	●	100	30	●	100		35	●	100	
	8	●	100	40	●	100		40	●	100	
	10	●	100	M6	10	●		100	50	●	100
	12	●	100		16	●	100	M10	25	●	100
	16	●	100		20	●	100		30	●	100
	20	●	100		25	●	100		50	●	100
	25	●	100	30	●	100					

~DIN 963 A	PA 6.6
~ISO 2009	
Polyamide 6.6 Poliamida 6.6	
■ white / blanco	

DIN 963: Standard withdrawn
Estándar descatalogado