MATICA MB

YOUR BEST SUPPLIER
your best partner



# RAZPORNE MATICE
## *RIVET NUTS*

Excellent
Small & Medium Enterprises
Gospodarska zbornica Slovenije
Chamber of Commerce and Industry Slovenia

2026
AAA
Preverjena odličnost
MATICA MB d.o.o.
MATICAMB d.o.o.

TÜV SÜD




2026
www.maticamb.si

# O nas

Podjetje Matica MB ni navadno trgovsko podjetje, ki samo preprodaja izdelke. Je podjetje, ki želi svojim kupcem približati optimalen, dovršen način sodelovanja.

Obvladovanje kvalitete blaga, prodajnega, nabavnega, logističnega procesa in stik s strankami so za naše podjetje prioriteta, h kateri stremimo, da lahko dosegamo najvišje standarde poslovanja.

To dokazujemo z vsakoletno rastjo, tehnološkimi presežki in izobraževanjem zaposlenih, ki so ključ, da lahko podjetje ustvarja uspešno zgodbo.

Največja matica na svetu, ki je postavljena pred podjetjem Matica MB in vpisana v Guinnessovo knjigo rekordov ima spodaj zapisan tudi moto podjetja: **KVALITETA – ZNANJE - SANJE.**

# *About Matica MB*

*Matica MB is not just an ordinary trading company that only resells the products. It is a company that wants to bring its customers an optimal, perfect way of cooperation.*

*Controlling the quality of goods, the sales, purchase, and logistics process, and contact with customers are priorities for our company, which we strive for in order to be able to achieve the highest business standards.*

*We prove this with our annual growth, technological surpluses and employee training, which are vital for the company's ability to create a successful story.*

*The world's largest hex nut, placed in front of the company Matica MB, and and is published in Guineness Book of World Records. Below is written motto of the company:* ***QUALITY – KNOWLEDGE – DREAMS.***

## KONTAKT / CONTACT


Pod hrasti 3, 1218 Komenda, Slovenia

T +386 59 958 319
E info@maticamb.si
W www.maticamb.si







# Vsebina / *Index*

## Cinkane razporne matice / *Zinc plated rivet nuts*


| | | |
|---|---|---|
| VRO | Veliki rob, odprte, pocinkane<br>*Flat head, open, zinc plated* | 5 |
| VRZ | Veliki rob, zaprte, pocinkane<br>*Flat head, closed, zinc plated* | |
| MRO | Mali rob, odprte, pocinkane<br>*Small csk head, open, zinc plated* | 6 |
| MRZ | Mali rob, zaprte, pocinkane<br>*Small head, closed, zinc plated* | |
| VRO-N | Veliki rob, odprte, narebrene, pocinkane<br>*Flat head, open, knurled, zinc plated* | 7 |
| VRZ-N | Veliki rob, zaprte, narebrene, pocinkane<br>*Flat head, closed, knurled, zinc plated* | |
| MRO-N | Mali rob, odprte, narebrene, pocinkane<br>*Small head, open, knurled, zinc plated* | 8 |
| MRZ-N | Mali rob, zaprte, narebrene, pocinkane<br>*Small head, closed, knurled, zinc plated* | |
| VVO | Vgreznjene, odprte, pocinkane<br>*Countersunk, open, zinc plated* | 9 |
| VVO-N | Vgreznjene, odprte, narebrene, pocinkane<br>*Countersunk, open, knurled, zinc plated* | |
| VRHO-P | Veliki rob, odprte, pol hexa, pocinkane<br>*Flat head, open, half hexa, zinc plated* | 10 |
| VRHZ-P | Veliki rob, zaprte, pol hexa, pocinkane<br>*Flat head, closed, half hexa, zinc plated* | |
| VRHO | Veliki rob, hexa, odprte, pocinkane<br>*Flat head, full hexa, open, zinc plated* | 11 |
| VRHZ | Veliki rob, hexa, zaprte, pocinkane<br>*Flat head, full hexa, closed, zinc plated* | |
| MRHO | Mali rob, hexa, odprte, pocinkane<br>*Small head, full hexa, open, zinc plated* | 12 |
| MRHZ | Mali rob, hexa, zaprte, pocinkane<br>*Small head, full hexa, closed, zinc plated* | |
| VRHO - P | Veliki rob, odprte, pol hexa, pocinkane<br>*Small head, half hexa, open, zinc plated* | 13 |
| MRHO - P | Mali rob, zaprte, pol hexa, pocinkane<br>*Small head, half hexa, closed, zinc plated* | |


## Nerjaveče razporne matice / *Stainless steel Rivet nuts*


| | | |
|---|---|---|
| NVRO | Veliki rob, odprte, nerjaveče jeklo<br>*Flat head, open, stainless steel* | 14 |
| NVRZ | Veliki rob, zaprte, nerjaveče jeklo<br>*Flat head, closed, stainless steel* | |
| NVRO-N | Veliki rob, odprte, narebrene, nerjaveče jeklo<br>*Flat head, open, knurled, stainless steel* | 15 |
| NVRZ-N | Veliki rob, zaprte, narebrene, nerjaveče jeklo<br>*Flat head, closed, knurled, stainless steel* | |
| NMRO | Mali rob, odprte, nerjaveče jeklo<br>*Small head, open, stainless steel* | 16 |
| NMRZ | Mali rob, zaprte, nerjaveče jeklo<br>*Small head, closed, stainless steel* | |
| NMRO-N | Mali rob, odprte, narebrene, nerjaveče jeklo<br>*Small head, open, knurled, stainless steel* | 17 |
| NMRZ-N | Mali rob, zaprte, narebrene, nerjaveče jeklo<br>*Small head, closed, knurled, stainless steel* | |
| NVVO | Vgreznjene, odprte, nerjaveče jeklo<br>*Countersunk, open, stainless steel* | 18 |
| NVVO-N | Vgreznjene, odprte, narebrene, nerjaveče jeklo<br>*Countersunk, open, knurled, stainless steel* | |
| NMRHO-P | Mali rob, odprte, pol hexa, nerjaveče jeklo<br>*Small head, open, half hexa, stainless steel* | 19 |
| NMRHZ-P | Mali rob, zaprte, pol hexa, nerjaveče jeklo<br>*Small head, closed, half hexa, stainless steel* | |
| NVRHO-P | Veliki rob, pol hexa, odprte, nerjaveče jeklo<br>*Flat head, half hexa, open, stainless steel* | 20 |
| NVRHZ-P | Veliki rob, pol hexa, zaprte, nerjaveče jeklo<br>*Flat head, half hexa, closed, stainless steel* | |


## Aluminijaste razporne matice / *Aluminium rivet nuts*



| | | |
|---|---|---|
| AVRO | Veliki rob, odprte, aluminijaste<br>*Flat head, open, aluminum* | 21 |
| AVRO-N | Veliki rob, odprte, narebrene, aluminijaste<br>*Flat head, open, knurled, aluminum* | |
| AMRO | Mali rob, odprte, aluminijaste<br>*Small head, open, aluminum* | 22 |
| AMRO-N | Mali rob, odprte, narebrene, aluminijaste<br>*Small head, open, knurled, aluminum* | |


## Orodja za razporne matice / *Rivet nut tools*


| | | |
|---|---|---|
| RIV912<br>RIV938S<br>RIV998<br>RIV990<br>RIV790<br>RIV905 | Pnevmatska orodja<br>*Pneumatic tools* | 23 |
| RIV900<br>RIV901<br>RIV903 | Ročna orodja<br>*Hand tools* | 23 |

# Splošno o razpornih maticah / *About rivet nuts*


## Razporne matice / *Rivet nuts*

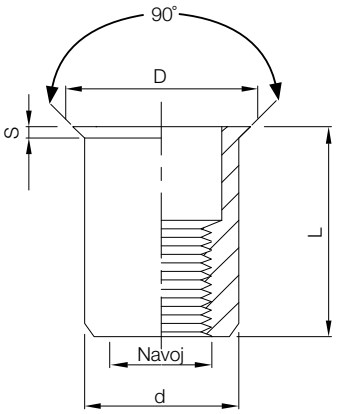



### Oznake / *Label*

D = premer glave / *head diameter*
S = debelina glave / *head thickness*
L = dolžina / *lenght*
d = zunanji premer / *outer diameter*
Navoj = premer metričnega navoja / *metric thread*


## Glava / *Head*




O
odprta / *open*




Z
zaprta / *closed*



H
6-kotna / *full hex*
*(hexagon rivet nut)*




P
pol 6-kotna / *semi hex*




- N
okrogla narebričana /
*round serrated*


## Oblika / *Shape (body)*



*VR = glava z velikim robom /*
*flat (cylindrical) head*



*V = vgrezna glava /*
*countersink head*



*MR = glava z malim robom /*
*reduced countersink head*


## Material


- = cinkano jeklo / *steel*
N = nerjaveče jeklo / *stainless steel*
A = aluminij / *aluminium*

# Cinkane razporne matice / *Zinc plated rivet nuts*


## VRO






Priporočljiva luknja
*Hole size*





### Tehnične podrobnosti / *Technical details*

| Navoj *Thread* | Debelina ploč. *Sheet thick.* Min.- Max. T (mm) | A Re | Priporočljiva luknja *Hole size* +0.1mm | D mm +0,07 / -0,10 | B mm | K mm | L mm |
|---|---|---|---|---|---|---|---|
| M3 | 0.5-1.5<br>1.5-2.5 | 4.7 | 5.0 | 4.9 | 7.2 | 0.8 | 8. 5<br>9.5 |
| M4 | 0.5-2.0<br>2.0-3.5 | 6.0 | 6 .0 | 5.9 | 8.5 | 0.8 | 10.5<br>12.0 |
| M5 | 0.5-2.5<br>2.5-5.0 | 7.5<br>8.5 | 7.0 | 6.9 | 10 | 1 | 13.0<br>17.0 |
| M6 | 0.5-3.0<br>3.0-5.5 | 9.2 | 9.0 | 8.9 | 12.3 | 1.3 | 15.5<br>18.0 |
| M8 | 0.5-3.5<br>3.5-6.0 | 11.5 | 11 .0 | 11.0 | 15.0 | 1.5 | 18.5<br>21.0 |
| M10 | 0.5-2.5 | 11.5 | 13 .0 | 12.9 | 16.3 | I.5 | 17.0 |
| | 2.5-4.0<br>4.0-6.0 | 12.5 | 13.0 | 12.9 | 17.0 | 1.6 | 21.0<br>24.0 |
| | 1.0-3.5 | 11.0 | 12.0 | 11.9 | 16.0 | 1.6 | 19.0 |
| M12 | 1.0-4.0<br>4.0-6.5 | 13.5 | 15.0 | 14.9 | 18.0 | 1.7 | 22.0<br>25.0 |
| | 1.0-4.0 | 16 | 16 | 15.9 | 22.0 | 2 | 25.0 |


## VRZ






Priporočljiva luknja
*Hole size*




### Tehnične podrobnosti / *Technical details*


| Navoj *Thread* | Debelina ploč. *Sheet thick.* Min.- Max. T (mm) | A Re | Priporočljiva luknja *Hole size* 0.I / 0 mm | D mm +0,07 / -0,10 | B mm | K mm | L mm |
|---|---|---|---|---|---|---|---|
| M3 | 0.5-1.5 | 10 | 5.0 | 4.9 | 7.2 | 0.8 | 13.3 |
| M4 | 0.5-2.0<br>2.0-4.0 | 11.3 | 6.0 | 5.9 | 9.0 | 0.8 | 16.0<br>18.0 |
| M5 | 0.5-2.5<br>2.5-5.0 | 11.5 | 7 .0 | 6 .9 | I0.0 | 1.0 | 17.<br>19.0 |
| M6 | 0.5-3.0<br>3.0-5.5 | 12.7 | 9.0 | 8.9 | 12.3 | 1.3 | 19.2<br>21.0 |
| M8 | 0.5-3.0<br>3.0-5.5 | 14.8 | 11.0 | 10.9 | 15.0 | 1.5 | 21.5<br>24.0 |
| M10 | 1.0-4.0 | 19.2 | 13.0 | 12.9 | 17.0 | 1.6 | 27.0 |

# Cinkane razporne matice / *Zinc plated rivet nuts*


## MRO






Priporočljiva luknja
*Hole size*





### Tehnične podrobnosti / *Technical details*

| Navoj<br>*Thread* | Debelina ploč.<br>*Sheet thick.*<br>Min.- Max. T (mm) | A<br>Re | Priporočljiva luknja<br>*Hole size*<br>0.l / 0 mm | D<br>mm<br>+0,07 / -0,10 | B<br>mm | K<br>mm | L<br>mm |
|---|---|---|---|---|---|---|---|
| M3 | 0.5-2.0 | 6.2 | 5.0 | 4.9 | 6.0 | 0. 5 | 9.0 |
| M4 | 0.5-2.0<br>2.0-4.0 | 6.5 | 6.0 | 5.9 | 7.0 | 0.5 | 10.5<br>13.0 |
| M5 | 0.5-2.0<br>2.0-4.0 | 7.0 | 7.0 | 6.9 | 8.0 | 0.5 | 11.5<br>13.0 |
| M6 | 0.5-2.5<br>2.5-5.0 | 8.5 | 9.0 | 8.9 | 10.5<br>10.0 | 0.6 | 14.0<br>17.0 |
| M8 | 0.5-3.0<br>3.0-5.0 | 10.0 | 11.0 | 10.9 | 12.0 | 0.65 | 16.5<br>18.5 |
| M10 | 0.5-3.0<br>3.0-5.0 | 13.0 | 13.0 | 12.9 | 14.1 | 0.7 | 17.7<br>21.0 |
| M10 | 0.5-3.0 | 12.5 | 12.0 | 11.9 | 13.0 | 0.7 | 18.0 |


## MRZ






Priporočljiva luknja
*Hole size*




### Tehnične podrobnosti / *Technical details*


| Navoj<br>*Thread* | Debelina ploč.<br>*Sheet thick.*<br>Min.- Max. T (mm) | A<br>Re | Priporočljiva luknja<br>*Hole size*<br>0.l / 0 mm | D<br>mm<br>+0,07 / -0,10 | B<br>mm | K<br>mm | L<br>mm |
|---|---|---|---|---|---|---|---|
| M4 | 0.5-2.0<br>2.0-3.5 | 11.0 | 6.0 | 5.9 | 7.0 | 0.5 | 15.0<br>16.0 |
| M5 | 0.5-2.0<br>2.0-3.5 | 12.5 | 7.0 | 6.9 | 8.0 | 0.5 | 16.5<br>17.5 |
| M6 | 0.5-2.5<br>2.5-4.0 | 15.5 | 9.0 | 8.9 | 10.0 | 0.6 | 20.5<br>22.0 |
| M8 | 0.5-3.0<br>2.5-4.5 | 17.0 | 11.0 | 10.9 | 12.0 | 0.65 | 23.0<br>24.5 |
| M10 | 1.0-3.0<br>3.0-5.0 | 18.2 | 13.0 | 12.9 | 14.1 | 0.7 | 24.5<br>26.0 |


# Cinkane razporne matice / *Zinc plated rivet nuts*

## VRO-N











### Tehnične podrobnosti / *Technical details*


| Navoj *Thread* | Debelina ploč. *Sheet thick.* Min.- Max. T (mm) | A Re | Priporočljiva luknja *Hole size* 0.l / 0 mm | D mm +0,07 / -0,10 | B mm | K mm | L mm |
|---|---|---|---|---|---|---|---|
| M3 | 0.5-1.5 | 6.0 | 5.0 | 4.9 | 8.0 | 0.8 | 10.0 |
| M4 | 0.5-2.0<br>2.0-3.5 | 6.0 | 6.0 | 5.9 | 9.0 | 0.8 | 10.5<br>12,0 |
| M5 | 0.5-2.5<br>2.5-5.0 | 7.5<br>8.5 | 7.0 | 6.9 | 10.0 | 1.0 | 13.0<br>16.5 |
| M6 | 0.5-3.0<br>3.0-5.5 | 9.2<br>10.5 | 9.0 | 8.9 | 12,3 | 1.3 | 15.5<br>19.5 |
| M8 | 1.0-3.5<br>3.5-6.0 | 11.5 | 11.0 | 10.9 | 14,5 | 1.5 | 18.5<br>21.0 |
| M10 | 1.0-4.0<br>4.0-6.5 | 13.5 | 13.0 | 12.9 | 17 | 1.7 | 21.5<br>24.0 |
| M10 | 1.0-3.5 | 11.0 | 12.0 | 11.9 | 16.0 | 1.6 | 19.0 |
| M12 | 3.5-6.0 | 16.0 | 16.0 | 15.9 | 22.0 | 2.0 | 28.0 |

## VRZ-N







### Tehnične podrobnosti / *Technical details*


| Navoj *Thread* | Debelina ploč. *Sheet thick.* Min.- Max. T (mm) | A Re | Priporočljiva luknja *Hole size* 0.l / 0 mm | D mm +0,07 / -0,10 | B mm | K mm | L mm |
|---|---|---|---|---|---|---|---|
| M4 | 0.5-2.0<br>2.0-4.0 | 11.3 | 6.0 | 5.9 | 9.0 | 0.8 | 16.0<br>18.0 |
| M5 | 0.5-2.5<br>2.5-5.0 | 11.5 | 7.0 | 6.9 | 10.5 | 1.0 | 17.0<br>19.0 |
| M6 | 0.5-3.0<br>3.0-5.0 | 12.7 | 9.0 | 8.9 | 12.3 | 1.3 | 19.2<br>21.0 |
| M8 | 0.5-3.0<br>3.0-5.5 | 14.8 | 11.0 | 10.9 | 15.0 | 1.5 | 21.5<br>24.0 |
| M10 | 1.0-4.0 | 19.2 | 13.0 | 12.9 | 17.0 | 1.6 | 27.0 |


# Cinkane razporne matice / *Zinc plated rivet nuts*

## MRO-N











### Tehnične podrobnosti / *Technical details*


| Navoj *Thread* | Debelina ploč. *Sheet thick.* Min.- Max. T (mm) | A Re | Priporočljiva luknja *Hole size* 0.I / 0 mm | D mm +0,07 / -0,10 | B mm | K mm | L mm |
|---|---|---|---|---|---|---|---|
| M3 | 0.5-2.0 | 6.2 | 5.0 | 4.9 | 6.0 | 0.5 | 9.0 |
| M4 | 0.5-2.0<br>2.0-4.0 | 7.0 | 6.0 | 5.9 | 7.0 | 0.5 | 11.2<br>13.0 |
| M5 | 0.5-2.0<br>2.0-4.0 | 7.0 | 7.0 | 6.9 | 8.0 | 0.5 | 11.5<br>13.0 |
| M6 | 0.5-2.5<br>2.5-5.0 | 8.5 | 9.0 | 8.9 | 10.0 | 0.6 | 14.0<br>16.0 |
| M8 | 0.5-3.0<br>3.0-5.0 | 10.0 | 11.0 | 10.9 | 12.0 | 0.65 | 16.5<br>18.5 |
| M10 | 1.0-3.5<br>3.5-6.0 | 12.5 | 13.0 | 12.9 | 14.0 | 0.7 | 19.5<br>22.0 |
| M12 | 1.0-4.0 | 16,5 | 16.0 | 15.9 | 17.6 | 0.75 | 24.2 |

## MRZ-N







### Tehnične podrobnosti / *Technical details*


| Navoj *Thread* | Debelina ploč. *Sheet thick.* Min.- Max. T (mm) | A Re | Priporočljiva luknja *Hole size* 0.I / 0 mm | D mm +0,07 / -0,10 | B mm | K mm | L mm |
|---|---|---|---|---|---|---|---|
| M4 | 0.5-2.0<br>2.0-3.5 | 11.0 | 6.0 | 5.9 | 7.0 | 0.5 | 15.0<br>16.5 |
| M5 | 0.5-2.0<br>2.0-3.5 | 12.5 | 7.0 | 6.9 | 8.0 | 0.5 | 16.5<br>18.0 |
| M6 | 0.5-3.0<br>3.0-4.5 | 15.5 | 9.0 | 8.9 | 10.0 | 0.6 | 20.5<br>22.0 |
| M8 | 0.5-3.0<br>3.0-4.5 | 17.0 | 11.0 | 10.9 | 12.0 | 0.65 | 23.0<br>24.5 |
| M10 | 1.0-3.0<br>3.0-5.0 | 18.2 | 13.0 | 12.9 | 14.0 | 0.7 | 24.5<br>26.0 |


# Cinkane razporne matice / *Zinc plated rivet nuts*

## VVO











### Tehnične podrobnosti / *Technical details*


| Navoj<br>*Thread* | Debelina ploč.<br>*Sheet thick.*<br>Min.- Max. T (mm) | A<br>Re | Priporočljiva luknja<br>*Hole size*<br>0.l / 0 mm | D<br>mm<br>+0,07 / -0,10 | B<br>mm | K<br>mm | L<br>mm |
|---|---|---|---|---|---|---|---|
| M4 | 1.5-3.0 | 6.5 | 6.0 | 5.9 | 9.0 | 1.5 | 12 |
| M5 | 1.5-3.5 | 7.5 | 7.0 | 6.9 | 10.0 | 1.5 | 13.0 |
| M6 | 1.5-4.0 | 9.0 | 9.0 | 8.9 | 12.0 | 1.5 | 15.5 |
| M8 | 2.0-4.5 | 11.0 | 11.0 | 10.9 | 14.0 | 1.5 | 18.5 |
| M10 | 2.0-5.0 | 13.0 | 13.0 | 12.9 | 16.0 | 1.5 | 21.0 |

## VVO-N







### Tehnične podrobnosti / *Technical details*


| Navoj<br>*Thread* | Debelina ploč.<br>*Sheet thick.*<br>Min.- Max. T (mm) | A<br>Re | Priporočljiva luknja<br>*Hole size*<br>0.l / 0 mm | D<br>mm<br>+0,07 / -0,10 | B<br>mm | K<br>mm | L<br>mm |
|---|---|---|---|---|---|---|---|
| M4 | 1.5-3.0 | 6.5 | 6.0 | 5.9 | 9.0 | 1.5 | 12.0 |
| M5 | 1.5-3.5 | 7.5 | 7.0 | 6.9 | 10.0 | 1.5 | 13.0 |
| M6 | 1.5-4.0 | 9.0 | 9.0 | 8.9 | 12.0 | 1.5 | 15.5 |
| M8 | 2.0-4.5 | 11.0 | 11.0 | 10.9 | 14.0 | 1.5 | 18.5 |
| M10 | 2.0-5.0 | 13.0 | 13,0 | 12,9 | 16.0 | 1.5 | 21.0 |
| M12 | 2.0-5.0 | 16.5 | 16.0 | 15.9 | 19.0 | 1.5 | 24.0 |

# Cinkane razporne matice / *Zinc plated rivet nuts*


## VRHO-P






Priporočljiva luknja
*Hole size*





### Tehnične podrobnosti / *Technical details*

| Navoj<br>*Thread* | Debelina ploč.<br>*Sheet thick.*<br>Min.- Max. T (mm) | A<br>Re | Priporočljiva luknja<br>*Hole size*<br>0.I / 0 mm | D<br>mm<br>+0,07 / -0,10 | B<br>mm | K<br>mm | L<br>mm |
|---|---|---|---|---|---|---|---|
| M4 | 0.5-2.0 | 6.5 | 6.0 | 5.9 | 9.0 | 0.8 | 11.0 |
| M5 | 0.5-2.5 | 8.0 | 7.0 | 6.9 | 10.0 | 1.0 | 13.0 |
| M6 | 0.5-3.0 | 8.5 | 9.0 | 8.9 | 12.7 | 1.35 | 15.0 |
| M8 | 1.0-3.5 | 10.5 | 11.0 | 10.9 | 16.0 | 1.5 | 18.0 |
| M10 | 1.0-3.5 | 12.5 | 13.0 | 12.9 | 18.0 | 1.7 | 21.0 |
| M12 | 2.05-5.0 | 16.5 | 16.0 | 15.9 | 23.0 | 2.2 | 27.5 |


## VRHZ-P






Priporočljiva luknja
*Hole size*




### Tehnične podrobnosti / *Technical details*


| Navoj<br>*Thread* | Debelina ploč.<br>*Sheet thick.*<br>Min.- Max. T (mm) | A<br>Re | Priporočljiva luknja<br>*Hole size*<br>0.I / 0 mm | D<br>mm<br>+0,07 / -0,10 | B<br>mm | K<br>mm | L<br>mm |
|---|---|---|---|---|---|---|---|
| M4 | 0.5-2.0 | 11.0 | 6.0 | 5.9 | 9.0 | 0.8 | 15.0 |
| M5 | 0.5-2.5 | 13.5 | 7.0 | 6.9 | 10.0 | 1.0 | 18.0 |
| M6 | 0.5-3.0 | 17.0 | 9.0 | 8.9 | 12.7 | 1.3 | 23.0 |
| M8 | 1.0-3.5 | 19.0 | 11.0 | 10.9 | 16.0 | 1.5 | 26.0 |
| M10 | 1.0-4.0 | 25.0 | 13.0 | 12.9 | 19.0 | 1.7 | 33.0 |

# Cinkane razporne matice / *Zinc plated rivet nuts*


## VRHO






Priporočljiva luknja
*Hole size*





### Tehnične podrobnosti / *Technical details*

| Navoj<br>*Thread* | Debelina ploč.<br>*Sheet thick.*<br>Min.- Max. T (mm) | A<br>Re | Priporočljiva luknja<br>*Hole size*<br>0.I / 0 mm | D<br>mm<br>+0,07 / -0,10 | B<br>mm | K<br>mm | L<br>mm |
|---|---|---|---|---|---|---|---|
| M4 | 0.5-2.0 | 6.5 | 6.0 | 5.9 | 9.0 | 0.8 | 11.0 |
| M5 | 0.5-2.5 | 8.0 | 7.0 | 6.9 | 10.0 | 1.0 | 14.0 |
| M6 | 0.5-3.0 | 8.5 | 9.0 | 8.9 | 13 | 1.35 | 16.0 |
| M8 | 1.0-3.5 | 10.5 | 11.0 | 10.9 | 16.0 | 1.5 | 18.0 |
| M10 | 1.0-3.5 | 12.5 | 13.0 | 12.9 | 18.0 | 1.7 | 21.0 |
| M12 | 2.0-5.0 | 16.5 | 16.0 | 15.9 | 23.0 | 2.0 | 27.0 |


## VRHZ






Priporočljiva luknja
*Hole size*




### Tehnične podrobnosti / *Technical details*


| Navoj<br>*Thread* | Debelina ploč.<br>*Sheet thick.*<br>Min.- Max. T (mm) | A<br>Re | Priporočljiva luknja<br>*Hole size*<br>0.I / 0 mm | D<br>mm<br>+0,07 / -0,10 | B<br>mm | K<br>mm | L<br>mm |
|---|---|---|---|---|---|---|---|
| M4 | 0.5-2.0 | 11.0 | 6.0 | 5.9 | 9.0 | 1.0 | 15.0 |
| M5 | 0.5-2.5 | 13.5 | 7.0 | 6.9 | 10.0 | 1.0 | 18.0 |
| M6 | 0.5-3.0 | 17,0 | 9.0 | 8.9 | 12.7 | 1.5 | 23,0 |
| M8 | 1.0-3.5 | 19.0 | 11.0 | 10.9 | 16.0 | 1.5 | 26.0 |
| M10 | 1.0-4.0 | 25.0 | 13.0 | 12.9 | 19.0 | 2.0 | 33.0 |

# Cinkane razporne matice / *Zinc plated rivet nuts*


## MRHO






Priporočljiva luknja
*Hole size*





### Tehnične podrobnosti / *Technical details*

| Navoj<br>*Thread* | Debelina ploč.<br>*Sheet thick.*<br>Min.- Max. T (mm) | A<br>Re | Priporočljiva luknja<br>*Hole size*<br>0.I / 0 mm | D<br>mm<br>+0,07 / -0,10 | B<br>mm | K<br>mm | L<br>mm |
|---|---|---|---|---|---|---|---|
| M4 | 0.5-2.5<br>2.5-5.0 | 6.7 | 6.0 | 5.9 | 7.0 | 0.5 | 11.0<br>13.5 |
| M5 | 0.5-3.0<br>3.0-5.0 | 9.0 | 7.0 | 6.9 | 8.0 | 0.5 | 14.5<br>16.0 |
| M6 | 1.0-3.5<br>3.5-6.0 | 10.0 | 9.0 | 8.9 | 10.0 | 0.6 | 16.0<br>18.0 |
| M8 | 1.0-4.0<br>4.0-6.0 | 11.5 | 11.0 | 10.9 | 12.0 | 0.65 | 18.0<br>20.0 |
| M10 | 1,0-3.5<br>3.5-6.0 | 12.5<br>14,5 | 13.0 | 12.9 | 14.5 | 0.75 | 19.0<br>23.5 |


## MRHZ






Priporočljiva luknja
*Hole size*




### Tehnične podrobnosti / *Technical details*


| Navoj<br>*Thread* | Debelina ploč.<br>*Sheet thick.*<br>Min.- Max. T (mm) | A<br>Re | Priporočljiva luknja<br>*Hole size*<br>0.I / 0 mm | D<br>mm<br>+0,07 / -0,10 | B<br>mm | K<br>mm | L<br>mm |
|---|---|---|---|---|---|---|---|
| M4 | 0.5-2.5 | 12.3 | 6.0 | 5.9 | 7.0 | 0.5 | 16.0 |
| M5 | 0.5-3.0 | 15.2 | 7.0 | 6.9 | 8.0 | 0.5 | 20.0 |
| M6 | 0.5-3.5 | 14.5 | 9.0 | 8.9 | 10.0 | 0.6 | 20.5 |
| M8 | 1.0-4.0 | 17.0 | 11.0 | 10.9 | 12.0 | 0.65 | 23.0 |
| M10 | 1.04-4.5 | 20.0 | 13.0 | 12.9 | 14.5 | 0.75 | 28.5 |


# Cinkane razporne matice / *Zinc plated rivet nuts*

## MRHO-P






### Tehnične podrobnosti / *Technical details*

| Navoj<br>*Thread* | Debelina ploč.<br>*Sheet thick.*<br>Min.- Max. T (mm) | A<br>Re | Priporočljiva luknja<br>*Hole size*<br>0.l / 0 mm | D<br>mm<br>+0,07 / -0,10 | B<br>mm | K<br>mm | L<br>mm |
|---|---|---|---|---|---|---|---|
| M4 | 0.5-2.0<br>2.0-3,5 | 8.3 | 6.0 | 5.9 | 7.0 | 0.5 | 12.0<br>13.5 |
| M5 | 0.5-2.5<br>2,5-4.0 | 8.7 | 7.0 | 6.9 | 8.0 | 0.5 | 13.0<br>14.5 |
| M6 | 1.0-3.5<br>3.0-5,5 | 10.5 | 9.0 | 8.9 | 10.0 | 0.6 | 16.0<br>18.0 |
| M8 | 1.0-3.5<br>3,5-6.0 | 11.3 | 11.0 | 10.9 | 12.0 | 0.65 | 17.5<br>19.7 |
| M10 | 1.0-4.0<br>4.0-6,5 | 12,8 | 13.0 | 12.9 | 14.5 | 0.75 | 21.0<br>24.0 |




1. KORAK: Privijte razporno matico (A) na trn (B) orodja za nameščanje. Pri odprti izvedbi naj trn štrli približno 1 mm. Pri zaprtih kovičastih maticah nadaljujte s privijanjem, dokler ne začutite upora. Privijte nakovalo (C) ob glavo razporne matice in ga blokirajte z varovalno matico (D).

2. KORAK: Vstavite razporno matico, nameščeno na orodju za nameščanje, v luknjo obdelovanca.

3. KORAK: Namestite razporno matico. Deformacijska razporne matice zdaj tvori protiglavo (bulbo) na spodnji strani obdelovanca.

4. KORAK: Odvijte trn z razporne matice.

5. KORAK: Razporna matica je zdaj nameščena. Zdaj lahko enostavno vstavite vijak ali vijak za sestavljanje druge komponente.

*STEP 1: Screw blind rivet nut (A) on the mandrel (B) of the setting tool. In the case of the open version, the mandrel should protrude about 1 mm. For closed rivet nuts, continue screwing until you feel resistance. Screw the anvil (C) against the head of the rivet nut and block it with the locking nut (D).*

*STEP 2: Insert the blind rivet nut, mounted on the setting tool, into the hole of the workpiece.*

*STEP 3: Set the rivet nut. The rivet's deformation chamber now forms the counter head (bulb) on the underside of the workpiece.*


*STEP 4: Unscrew the mandrel from the rivet nut.*


*STEP 5: The blind rivet nut is now set. You can now easily insert your bolt or screw to assemble another component.*


# Nerjaveče razporne matice / *Stainless steel rivet nuts*

## NVRO (inox)











### Tehnične podrobnosti / *Technical details*


| Navoj *Thread* | Debelina ploč. *Sheet thick.* Min.- Max. T (mm) | A Re | Priporočljiva luknja *Hole size* 0.I / 0 mm | D mm +0,07 / -0,10 | B mm | K mm | L mm |
|---|---|---|---|---|---|---|---|
| M4 | 0.5-2.0 | 6.0 | 6.0 | 5.9 | 8.5 | 0.8 | 10.5 |
| M5 | 0.5-2.5 | 7.5 | 7.0 | 6.9 | 10.0 | 1.0 | 13.0 |
| M6 | 0.5-3.0 | 9.2 | 9.0 | 8.9 | 12.3 | 1.3 | 15.5 |
| M8 | 1.0-3.5 | 11.5 | 11.0 | 10.9 | 15.0 | 1.5 | 18.5 |
| M10 | 1.0-4.0 | 12.5 | 13.0 | 12.9 | 17.0 | 1.6 | 21.0 |

## NVRZ (inox)







### Tehnične podrobnosti / *Technical details*


| Navoj *Thread* | Debelina ploč. *Sheet thick.* Min.- Max. T (mm) | A Re | Priporočljiva luknja *Hole size* 0.I / 0 mm | D mm +0,07 / -0,10 | B mm | K mm | L mm |
|---|---|---|---|---|---|---|---|
| M4 | 0.5-2.0 | 11.3 | 6.0 | 5.9 | 9.0 | 0.8 | 16.0 |
| M5 | 0.5-2.5 | 13.9 | 7.0 | 6.9 | 10.0 | 1.0 | 19.0 |
| M6 | 0.5-3.0 | 15.0 | 9.0 | 8.9 | 12.3 | 1.3 | 21.0 |
| M8 | 1.0-3.5 | 18.2 | 11.0 | 10.9 | 15.5 | 1.5 | 25.0 |
| M10 | 1.0-4.0 | 19.4 | 13.0 | 12.9 | 17.0 | 1.6 | 27.0 |


# Nerjaveče razporne matice / *Stainless steel rivet nuts*

## NVRO-N (inox)










Priporočljiva luknja
*Hole size*


### Tehnične podrobnosti / *Technical details*


| Navoj<br>*Thread* | Debelina ploč.<br>*Sheet thick.*<br>Min.- Max. T (mm) | A<br>Re | Priporočljiva luknja<br>*Hole size*<br>0.l / 0 mm | D<br>mm<br>+0,07 / -0,10 | B<br>mm | K<br>mm | L<br>mm |
|---|---|---|---|---|---|---|---|
| M4 | 0.5-2.0<br>2.0-4.0 | 6.5 | 6.0 | 5.9 | 9.0 | 0.8 | 10.5<br>12.5 |
| M5 | 0.5-2.5<br>2.0-4.0 | 8.0 | 7.0 | 6.9 | 10.0 | 1.0 | 13.0<br>16.0 |
| M6 | 0.5-3.0 | 9.2 | 9.0 | 8.9 | 12.3 | 1.3 | 15.5<br>17.5 |
| M8 | 1.0-3.5<br>3.5-6.0 | 11.5 | 11.0 | 10.9 | 14.5 | 1.5 | 18.5<br>21.0 |
| M10 | 1.0-4.0<br>3.5-6.0 | 13.5 | 13.0 | 12.9 | 17.0 | 1.6 | 21.0<br>24.0 |
| M12 | 1.5-4.0 | 14.5 | 16.0 | 15.9 | 23.0 | 2.0 | 25.0 |

## NVRZ-N (inox)









Priporočljiva luknja
*Hole size*


### Tehnične podrobnosti / *Technical details*


| Navoj<br>*Thread* | Debelina ploč.<br>*Sheet thick.*<br>Min.- Max. T (mm) | A<br>Re | Priporočljiva luknja<br>*Hole size*<br>0.l / 0 mm | D<br>mm<br>+0,07 / -0,10 | B<br>mm | K<br>mm | L<br>mm |
|---|---|---|---|---|---|---|---|
| M4 | 0.5-2.0 | 11.8 | 6.0 | 5.9 | 9.0 | 0.8 | 16.0 |
| M5 | 0.5-2.5 | 12.0 | 7.0 | 6.9 | 10.0 | 1.0 | 17.0 |
| M6 | 0.5-3.0 | 12.7 | 9.0 | 8.9 | 12.3 | 1.3 | 19.2 |
| M8 | 1.0-3.5 | 14.2 | 11.0 | 10.9 | 15.0 | 1.5 | 21.5 |
| M10 | 1.0-4.0 | 18.0 | 13.0 | 12.9 | 17.0 | 1.6 | 27.0 |


# Nerjaveče razporne matice / *Stainless steel rivet nuts*

## NMRO (inox)











### Tehnične podrobnosti / *Technical details*


| Navoj *Thread* | Debelina ploč. *Sheet thick.* Min.- Max. T (mm) | A Re | Priporočljiva luknja *Hole size* 0.I / 0 mm | D mm +0,07 / -0,10 | B mm | K mm | L mm |
|---|---|---|---|---|---|---|---|
| M4 | 0.5-2.0 | 6.5 | 6.0 | 5.9 | 7.0 | 0.5 | 10.5 |
| M5 | 0.5-2.0 | 7.0 | 7.0 | 6.9 | 8.0 | 0.5 | 11.5 |
| M6 | 0.5-2.5 | 8.5 | 9.0 | 8.9 | 10.0 | 0.6 | 14.0 |
| M8 | 0.5-3.0 | 10.5 | 11.0 | 10.9 | 12.0 | 0.65 | 16.5 |
| M10 | 1.0-3.5 | 11.5 | 13.0 | 12.9 | 14.0 | 0.7 | 17.7 |

## NMRZ (inox)







### Tehnične podrobnosti / *Technical details*


| Navoj *Thread* | Debelina ploč. *Sheet thick.* Min.- Max. T (mm) | A Re | Priporočljiva luknja *Hole size* 0.I / 0 mm | D mm +0,07 / -0,10 | B mm | K mm | L mm |
|---|---|---|---|---|---|---|---|
| M4 | 0.5-2.0 | 11.0 | 6.0 | 5.9 | 7.0 | 0.5 | 15.0 |
| M5 | 0.5-2.0 | 12.5 | 7.0 | 6.9 | 8.0 | 0.5 | 16.5 |
| M6 | 0.5-2.5 | 15.5 | 9.0 | 8.9 | 10.0 | 0.6 | 20.5 |
| M8 | 0.5-3.0 | 17.6 | 11.0 | 10.9 | 12.0 | 0.65 | 23.0 |
| M10 | 1.0-3.5 | 18.3 | 13.0 | 12.9 | 14.0 | 0.7 | 24.5 |


# Nerjaveče razporne matice / *Stainless steel rivet nuts*

## NMRO-N (inox)











### Tehnične podrobnosti / *Technical details*

| Navoj *Thread* | Debelina ploč. *Sheet thick.* Min.- Max. T (mm) | A Re | Priporočljiva luknja *Hole size* 0.l / 0 mm | D mm +0,07 / -0,10 | B mm | K mm | L mm |
|---|---|---|---|---|---|---|---|
| M3 | 0.5-2 | 5.0 | 5.0 | 4.9 | 6.0 | 0.5 | 9.0 |
| M4 | 0.5-2.0<br>2.0-4.0 | 6.5 | 6.0 | 5.9 | 7.0 | 0.5 | 10.5<br>13.0 |
| M5 | 0.5-2.0<br>2.0-4.0 | 7.0 | 7.0 | 6.9 | 8.0 | 0.5 | 11.5<br>13.5 |
| M6 | 0.5-2.5<br>2.5-5.0 | 8.5 | 9.0 | 8.9 | 10.0 | 0.6 | 14.0<br>16.0 |
| M8 | 0.5-3.0<br>3.0-6.0 | 10.5 | 11.0 | 10.9 | 12.0 | 0.65 | 16.5<br>18.5 |
| M10 | 1.0-3.5<br>3.5-6-0 | 11.5 | 13.0 | 12.9 | 14.0 | 0.7 | 17.7<br>21.5 |
| M12 | 1.0-4.0 | 15.5 | 16.0 | 15.9 | 17.6 | 0.75 | 24.2 |

## NMRZ-N (inox)










### Tehnične podrobnosti / *Technical details*


| Navoj *Thread* | Debelina ploč. *Sheet thick.* Min.- Max. T (mm) | A Re | Priporočljiva luknja *Hole size* 0.l / 0 mm | D mm +0,07 / -0,10 | B mm | K mm | L mm |
|---|---|---|---|---|---|---|---|
| M4 | 0.5-2.0 | 11.2 | 6.0 | 5.9 | 7.0 | 0.5 | 15.0 |
| M5 | 0.5-2.0 | 11.5 | 7.0 | 6.9 | 8.0 | 0.5 | 16.5 |
| M6 | 0.5-2.5 | 15.0 | 9.0 | 8.9 | 10.0 | 0.6 | 20.5 |
| M8 | 0.5-3.0 | 17.5 | 11.0 | 10.9 | 12.0 | 0.65 | 23.0 |
| M10 | 1.0-3.5 | 18.0 | 13.0 | 12.9 | 14.0 | 0.7 | 24.5 |

# Nerjaveče razporne matice / *Stainless steel rivet nuts*


## NVVO (inox)






Priporočljiva luknja
*Hole size*





### Tehnične podrobnosti / *Technical details*

| Navoj *Thread* | Debelina ploč. *Sheet thick.* Min.- Max. T (mm) | A Re | Priporočljiva luknja *Hole size* 0.I / 0 mm | D mm +0,07 / -0,10 | B mm | K mm | L mm |
|---|---|---|---|---|---|---|---|
| M4 | 1.5-3.0 | 7.5 | 6.0 | 5.9 | 9.0 | 1.5 | 12.0 |
| M5 | 1.5-3.5 | 7.8 | 7.0 | 6.9 | 10.0 | 1.5 | 13.0 |
| M6 | 1.5-4.0 | 9.0 | 9.0 | 8.9 | 12.0 | 1.5 | 15.5 |
| M8 | 2.0-4.5 | 12.0 | 11.0 | 10,9 | 14.0 | 1.5 | 18.5 |
| M10 | 2.0-5.0 | 13.0 | 13.0 | 12.9 | 16.0 | 1.5 | 21.0 |


## NVVO-N (inox)






Priporočljiva luknja
*Hole size*




### Tehnične podrobnosti / *Technical details*


| Navoj *Thread* | Debelina ploč. *Sheet thick.* Min.- Max. T (mm) | A Re | Priporočljiva luknja *Hole size* 0.I / 0 mm | D mm +0,07 / -0,10 | B mm | K mm | L mm |
|---|---|---|---|---|---|---|---|
| M4 | 1.5-3.0 | 7.5 | 6.0 | 5.9 | 9.0 | 1.5 | 12.0 |
| M5 | 1.5-3.5 | 7.8 | 7.0 | 6.9 | 10.0 | 1.5 | 13.0 |
| M6 | 1.5-4.0 | 9.0 | 9.0 | 8.9 | 12.0 | 1.5 | 15.5 |
| M8 | 2.0-4.5 | I2.0 | 11.0 | 10.9 | 14.0 | 1.5 | 18.5 |
| M10 | 2.0-5.0 | 13.0 | 13.0 | 12.9 | 16.0 | 1.5 | 21.0 |

# Nerjaveče razporne matice / *Stainless steel rivet nuts*


## NMRHO-P (inox)






Priporočljiva luknja
*Hole size*





### Tehnične podrobnosti / *Technical details*

| Navoj *Thread* | Debelina ploč. *Sheet thick.* Min.- Max. T (mm) | A Re | Priporočljiva luknja *Hole size* 0.I / 0 mm | D mm +0,07 / -0,10 | B mm | K mm | L mm |
|---|---|---|---|---|---|---|---|
| M3 | 0.5-1.5 | 5.0 | 5.0 | 4.9 | 6.0 | 0.5 | 9.0 |
| M4 | 0.5-2.0<br>2.0-3.5 | 8.0 | 6.0 | 5.9 | 7.0 | 0.5 | 12.0<br>13.5 |
| M5 | 0.5-2.5<br>2.5-4.0 | 8.2 | 7.0 | 6.9 | 8.0 | 0.5 | 13.0<br>14.5 |
| M6 | 0.5-3.0<br>3.0-5.5 | 10.7 | 9.0 | 8.9 | 10.0 | 0.6 | 16.0<br>18.0 |
| M8 | 1.0-3.5<br>3.5-6.0 | 11.2 | 11.0 | 10.9 | 12.0 | 0.65 | 17.5<br>20.2 |
| M10 | 1.0-4.0<br>4.0-6.5 | 13.5 | 13.0 | 12.9 | 14.5 | 0.75 | 21.0<br>24.0 |
| M12 | 1.0-4.0 | 15.5 | 16.0 | 15.9 | 17.5 | 0.75 | 24.0 |


## NMRHZ-P (inox)






Priporočljiva luknja
*Hole size*




### Tehnične podrobnosti / *Technical details*


| Navoj *Thread* | Debelina ploč. *Sheet thick.* Min.- Max. T (mm) | A Re | Priporočljiva luknja *Hole size* 0.I / 0 mm | D mm +0,07 / -0,10 | B mm | K mm | L mm |
|---|---|---|---|---|---|---|---|
| M4 | 0.5-2.0 | 11.5 | 6.0 | 5.9 | 7.0 | 0.5 | 15.5 |
| M5 | 0.5-2.5 | 13.5 | 7.0 | 6.9 | 8.0 | 0.5 | 18.0 |
| M6 | 0.5-3.5 | 15.8 | 9.0 | 8.9 | 10.0 | 0.6 | 21.5 |
| M8 | 1.0-3.5 | 18.2 | 11.0 | 10.9 | 12.0 | 0.65 | 24.0 |
| M10 | 1.0-4.0 | 23.2 | 13.0 | 12.9 | 14.5 | 0.75 | 30.5 |


# Nerjaveče razporne matice / *Stainless steel rivet nuts*

## NVRHO-P (inox)











### Tehnične podrobnosti / *Technical details*


| Navoj *Thread* | Debelina ploč. *Sheet thick.* Min.- Max. T (mm) | A Re | Priporočljiva luknja *Hole size* 0.l / 0 mm | D mm +0,07 / -0,10 | B mm | K mm | L mm |
|---|---|---|---|---|---|---|---|
| M4 | 0.5-2.0 | 7.2 | 6.0 | 5.9 | 9.0 | 0.8 | 11.0 |
| M5 | 0.5-2.5 | 7.5 | 7.0 | 6.9 | 10.0 | 1.0 | 12.0 |
| M6 | 0.5-3.0 | 9.2 | 9.0 | 8.9 | 12.7 | 1.3 | 15.5 |
| M8 | 1.0-3.5 | 11.0 | 11.0 | 10.9 | 16.0 | 1.5 | 18.0 |
| M10 | 1.0-4.0 | 13.2 | 13.0 | 12.9 | 18.0 | 1.7 | 21.0 |

## NVRHZ-P (inox)







### Tehnične podrobnosti / *Technical details*


| Navoj *Thread* | Debelina ploč. *Sheet thick.* Min.- Max. T (mm) | A Re | Priporočljiva luknja *Hole size* 0.l / 0 mm | D mm +0,07 / -0,10 | B mm | K mm | L mm |
|---|---|---|---|---|---|---|---|
| M4 | 0.5-2.0 | 11.5 | 6.0 | 5.9 | 9.0 | 1.0 | 16.0 |
| M5 | 0.5-2.5 | 13.5 | 7.0 | 6.9 | 10.0 | 1.0 | 18.5 |
| M6 | 0.5-3.0 | 17.0 | 9.0 | 8.9 | 12.7 | 1.5 | 23.0 |
| M8 | 1.0-3.5 | 18.2 | 11.0 | 10.9 | 16.0 | 1.5 | 25.0 |
| M10 | 1.0-4.0 | 25.0 | 13.0 | 12.9 | 19.0 | 1.7 | 33.0 |


# Aluminijaste razporne matice / *Aluminium rivet nuts*

## AVRO (aluminij)











### Tehnične podrobnosti / *Technical details*


| Navoj<br>*Thread* | Debelina ploč.<br>*Sheet thick.*<br>Min.- Max. T (mm) | A<br>Re | Priporočljiva luknja<br>*Hole size*<br>0.I / 0 mm | D<br>mm<br>+0,07 / -0,10 | B<br>mm | K<br>mm | L<br>mm |
|---|---|---|---|---|---|---|---|
| M4 | 0.5-2.0 | 6.0 | 6.0 | 5.9 | 8.8 | 0.8 | 10.5 |
| M5 | 0.5-2.5 | 7.5 | 7.0 | 6.9 | 10.0 | 1.0 | 13.0 |
| M6 | 0.5-2.5 | 9.2 | 9.0 | 8.9 | 12.3 | 1.5 | 15.0 |
| M8 | 1.0-3.0 | 10.2 | 11.0 | 10.9 | 14.3 | 1.5 | 16.5 |
| M10 | 1.0-4.0 | 11.5 | 13.0 | 12.9 | 16.3 | 1.6 | 19.0 |

## AVRO-N (aluminij)







### Tehnične podrobnosti / *Technical details*


| Navoj<br>*Thread* | Debelina ploč.<br>*Sheet thick.*<br>Min.- Max. T (mm) | A<br>Re | Priporočljiva luknja<br>*Hole size*<br>0.I / 0 mm | D<br>mm<br>+0,07 / -0,10 | B<br>mm | K<br>mm | L<br>mm |
|---|---|---|---|---|---|---|---|
| M4 | 0.5-2.0 | 6.0 | 6.0 | 5.9 | 8.8 | 0.8 | 10.5 |
| M5 | 0.5-2.5 | 7.5 | 7.0 | 6.9 | 10.0 | 1.0 | 13.0 |
| M6 | 0.5-2.5 | 9.2 | 9.0 | 8.9 | 12.3 | 1.5 | 15.0 |
| M8 | 1.0-3.0 | 10.2 | 11.0 | 10.9 | 14.3 | 1.5 | 16.5 |
| M10 | 1.0-4.0 | 11.5 | 13.0 | 12.9 | 16.3 | 1.6 | 19.0 |


# Aluminijaste razporne matice / *Aluminium rivet nuts*

## AMRO (aluminij)











### Tehnične podrobnosti / *Technical details*


| Navoj<br>*Thread* | Debelina ploč.<br>*Sheet thick.*<br>Min.- Max. T (mm) | A<br>Re | Priporočljiva luknja<br>*Hole size*<br>0.l / 0 mm | D<br>mm<br>+0,07 / -0,10 | B<br>mm | K<br>mm | L<br>mm |
|---|---|---|---|---|---|---|---|
| M4 | 0.5-2.0 | 6.0 | 6.0 | 5.9 | 7.0 | 0.5 | 10.5 |
| M5 | 0.5-2.0 | 7.5 | 7.0 | 6.9 | 8.0 | 0.5 | 11.5 |
| M6 | 0.5-2.5 | 9.2 | 9.0 | 8.9 | 10.0 | 0.6 | 14.0 |
| M8 | 0.5-2.5 | 10.2 | 11.0 | 10.9 | 12.0 | 0.65 | 15.5 |
| M10 | 1.0-3.0 | 11.5 | 13.0 | 12.9 | 14.1 | 0.7 | 17.7 |

## AMRO-N (aluminij)






### Tehnične podrobnosti / *Technical details*

| Navoj<br>*Thread* | Debelina ploč.<br>*Sheet thick.*<br>Min.- Max. T (mm) | A<br>Re | Priporočljiva luknja<br>*Hole size*<br>0.l / 0 mm | D<br>mm<br>+0,07 / -0,10 | B<br>mm | K<br>mm | L<br>mm |
|---|---|---|---|---|---|---|---|
| M4 | 0.5-2.0 | 6.0 | 6.0 | 5.9 | 7.0 | 0.5 | 10.5 |
| M5 | 0.5-2.0 | 7.5 | 7.0 | 6.9 | 8.0 | 0.5 | 11.5 |
| M6 | 0.5-2.5 | 9.2 | 9.0 | 8.9 | 10.0 | 0.6 | 14.0 |
| M8 | 0.5-2.5 | 10.2 | 11.0 | 10.9 | I2.0 | 0.65 | 15.5 |
| M10 | 1.0-3.0 | 11.5 | 13.0 | 12.9 | 14.1 | 0.7 | 17.7 |

# Orodja za razporne matice / Rivet nut tools

## RIV740 / 730



| | |
|---|---|
| Uporaben razpon<br>*Range* | M3-M12<br>(730 = M3-M10) |
| Hod<br>*Stroke* (mm) | 10 |
| Baterija<br>*Baterie* | 18V / 2,0 Ah / 36Wh |
| Teža<br>*Weight* (kg) | 2,1 |

## RIV938



| | |
|---|---|
| Uporaben razpon<br>*Range* | M3-M10 |
| Hod<br>*Stroke* (mm) | 6,5 |
| Delovni pritisk<br>*Pressure* (bar) | 5-7 |
| Teža<br>*Weight* (kg) | 2,04 |

## RIV998



| | |
|---|---|
| Uporaben razpon<br>*Range* | M3-M12 |
| Hod<br>*Stroke* (mm) | 0-6,5 |
| Delovni pritisk<br>*Pressure* (bar) | 5-7 |
| Teža<br>*Weight* (kg) | 2,4 |


# Ročna orodja / Hand tools

## RIV98





| | |
|---|---|
| Uporaben razpon<br>*Range* | M3-M6 |
| Teža<br>*Weight* (kg) | 5,35 |

## RIV901

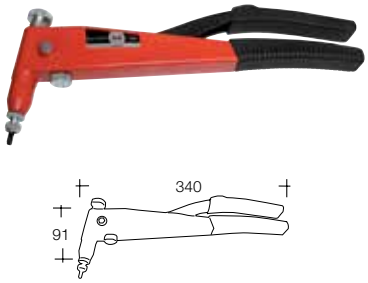


| | |
|---|---|
| Uporaben razpon<br>*Range* | M3-M6 |
| Teža<br>*Weight* (kg) | 0,910 |

## RIV903

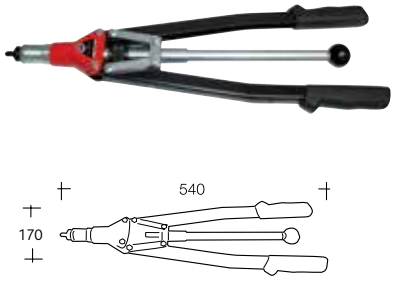


| | |
|---|---|
| Uporaben razpon<br>*Range* | M3-M10 |
| Teža<br>*Weight* (kg) | 2,2 |

# MATICA MB

*VAŠ NAJBOLJŠI DOBAVITELJ*
*vaš najboljši partner*



GUINNESS WORLD RECORDS
RECORD HOLDER





KOVIČNI MATERIAL
RIVETING MATERIAL

VIJAČNI MATERIAL
FASTENERS

Največja matica na svetu




ORODJA
TOOLS

SERVIS





PRIVARILNI ELEMENTI
WELDING ELEMENTS

VTISNI ELEMENTI
SELF-CLICH FASTENERS





**MATICA MB d.o.o., Pod hrasti 3, 1218 Komenda, Slovenija**
**T** +386 59 958 319
**E** info@maticamb.si
**W** www.maticamb.si